THE DATATAG POWER TOOL SYSTEM INSTRUCTIONS
A QUICK FIT INSTALLATION GUIDE
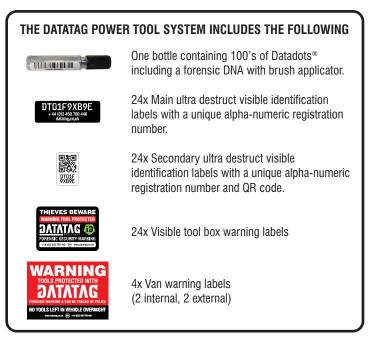
DATATAG SECURITY

**Thank you for purchasing this Datatag Multi Power Tool system.
Please take just a few minutes to read this guide to installation.**

IMPORTANT

- **Owners must register an account with Datatag prior to adding the power tool system and individual power tool details online as soon as possible after installation.**
- **Your power tools are not protected until registered.**
- **For advice please call: (UK) 03 450 700 440.**

Datatag allows for the marking of your power tools using a combination of state of the art identification technology including the Datadot® identification system, the new QR code enabled ultra destruct warning labels and the ultimate forensic chemical DNA. This makes Datatag's award winning system one of the most successful deterrents to theft available.

THE DATATAG POWER TOOL SYSTEM INCLUDES THE FOLLOWING

One bottle containing 100's of Datadots® including a forensic DNA with brush applicator.

DT01F9XB9E
+44 (0)3 450 700 440
datatag.co.uk

24x Main ultra destruct visible identification labels with a unique alpha-numeric registration number.

DT01F 9XB9E

24x Secondary ultra destruct visible identification labels with a unique alpha-numeric registration number and QR code.

THIEVES BEWARE
WARNING TOOL PROTECTED
DATATAG iD
FORENSIC SECURITY MARKING
+44 (0)3 450 700 440

24x Visible tool box warning labels

WARNING
TOOLS PROTECTED WITH
DATATAG
FORENSIC MARKING & CAN BE TRACED BY POLICE
NO TOOLS LEFT IN VEHICLE OVERNIGHT
www.datatag.co.uk

4x Van warning labels
(2 internal, 2 external)

FITTING INSTRUCTIONS

The Tamper Evident Visible Identification Labels

The identification labels, one of the most important parts of the system, shows your power tools primary identification number which can be traced by the police. Care must be taken when applying these labels as once applied they cannot be easily removed.

For the system to be fully effective one main identification label should be installed in a location on the main body of your power tools in clearly visible areas and not applied on covers that are easily removed or swapped, or where the label will be subject to wear and tear through normal use that will result in damage.

The secondary QR code identification labels should be used to mark the batteries and/or chargers associated with the main tool system.

The Installation Procedure is as follows:

Having selected a suitable location for the label, on the main body of the power tool for the main ID label and on the battery for the secondary label, clean the area with a suitable solvent cleaner and dry with a dry clean cloth. Carefully peel one label away from the backing sheet taking care to hold it by the edges.

Apply the label to the previously identified and prepared surface carefully placing one end on to the tool and smoothing down the remainder to ensure no air bubbles are trapped within. Smooth out the surface of the label using a dry clean cloth, ensuring that the label is properly pressed into the surface. Repeat for other tools as required.

The labels are tamper evident so once applied no attempt to adjust or remove should be made as this may result in the label tearing or distorting.

The label will become fully tamper evident after approx. 12 hours.

DATATAG SECURITY

FITTING INSTRUCTIONS

Datadots®

Each bottle contains 100's of Datadots®; each dot within the tube carries the same unique ID information. Datadots® are used to protect as many parts and areas of your power tool as possible and are read using off the shelf magnifiers.

The Datadots® are suspended in a clear UV fluorescent adhesive which may not dry to a perfect factory type "flat" paint finish - therefore we recommend that you do not apply Datadots® to overt areas where they may look unsightly e.g. on the top of covers etc.

Ensure surfaces are clean, dry and free from oil or grease prior to application of the Datadots®. Use the Datadots® to mark:

- Inside removable covers
- Engines, outside fuel tanks and wiring (petrol tools only)
- Vents, inside and between
- Inside handle
- Bottom of tool and screw access holes
- Batteries and chargers

The Installation Procedure is as follows:

Shake the bottle well before use to ensure good distribution of the Datadots® within the adhesive. You may wish to warm the bottle beforehand.

Using the brush supplied within the lid of the bottle, dab/roll the Datadots® onto the areas of the tool to be marked. Mark liberally and try to use as many of the dots as possible.

Apply the Datadots® where they are least likely to be affected by dirt, rain, spray, regular washing/cleaning and day to day use.

Once all tools have been marked, leave the cap off the bottle and dispose of both parts in a general waste bin.

IMPORTANT NOTE: The Datadots® are unique to your system, their number is registered to you. DO NOT use any remaining spare Datadots® on any product, tool or asset that has not been protected by an ID label from the same system as this may cause issues with identification if a power tool is stolen and recovered by Police.

WARNING: Handling & Safety Precautions

Storage - The Datadots® should be stored in cool conditions away from direct sunlight. They should be kept away from food and drink and out of reach of children.

Spillage - Spillage of the small quantity supplied in this system can be cleaned up using a cloth along with water and detergent.

Handling Precautions

- Do not spray on an open flame or other ignition source.
- Take action to prevent static discharges.
- Do not eat, drink, or smoke when using this product.

Safety Information

Eye Contact - Wash eye(s) thoroughly with plenty of water. If in doubt seek immediate medical attention.

Skin Contact - Remove any affected clothing and wash separately. Wash any fluid from skin thoroughly with plenty of soap and water.

Swallowing - The nature of the product makes it impossible to ingest in harmful quantities unless deliberate. If a small quantity is ingested, immediately give a glass of water DO NOT induce vomiting. First aid is not generally required. If in doubt, please seek medical attention.

Inhalation - Move to fresh air. In case of discomfort seek medical attention. It is advisable to use a well ventilated environment when fitting the system.

As a general precaution and in the interest of safety and hygiene, always wash hands thoroughly after use.

COMPLETING THE REGISTRATION FORM

Registering your Datatag Power Tool System.
Please go to: https://www.datatag.mobi/MyDatatag/
register for an account and then follow the on screen instructions.
If we do not receive your registration your Power Tool is not registered.